



www.BrownsConcrete.com



BROWN'S SIGNATURE COLLECTION

PAVERS | RETAINING WALLS | CURBS | FIRE PITS

MADE STRONG WITH THE FINEST GRANITE AGGREGATE

CONTENTS

Appian2

Colonial4

Athenian.....5

Belgium – Belgium Cobble, Belgium Classic6

Venetian – Venetian Cobble, Venetian Classic8

Nordic – Nordic Stone, Nordic Stone Classic, Nordic Square . 10

Avennio.....11

AquaPave®.....12

Paver Installation.....14

Dimensional Classic15

Parkwall® – Parkwall®, Parkwall® Classic.....16

Wedgestone™ – Wedgestone™, Wedgestone™ Classic ... 18

Pisa® Light.....19

Segmental Retaining Wall Installation20

Curbing.....21

Dry Cast FirePit Kits21

BROWN’S SIGNATURE COLLECTION

Brown’s Concrete Products Limited offers a wide range of landscape design products and expertise that will help you create an amazing reflection of your own good taste. Our quality products meet and exceed industry manufacturing standards that will ensure impeccable results for your dream projects.

For any dealer, contractor or do-it-yourself installer, Brown’s multitude of products, sizes, patterns and colors provide great opportunity to bring any hardscape idea to life. The key to our extraordinary and durable concrete products is our granite aggregates. Our unique and time tested process ensures a longer lasting, more durable product.



APPIAN - TIMBERWOOD



A MESSAGE TO OUR CUSTOMERS

Brown's Concrete understands the importance of an outdoor living space. It is a sanctuary that is uniquely your own, establishing a positive first impression and adds value to your property.

For more than a century, Brown's has been adding value to concrete. As a family owned and operated business, we rely on the strength of each other, just as our concrete relies on the strength of granite to provide a superior product. From our concrete construction block, to our Signature Collection, we always strive to provide only the best quality product to our customers.

At Brown's, we are dedicated to developing new ideas, products and innovative solutions for your hardscape projects. Our team is always looking to the future of residential, commercial and institutional construction to find the next trend so that we may provide you with a unique, attractive and innovative solution.

As the trend towards green construction and environmentally friendly practices grows, so have our efforts to meet those trends. Our AquaPave by Brown's permeable paver system is a complete system that provides a proven solution for controlling rainfall and surface water run-off. With many systems in place for over a decade, the AquaPave system has proven to be a winner.

From all of us at Brown's Concrete, we look forward to another great season in 2016.




APPIAN

NIPISSING


SHAPES AND SIZES



SMALL RECTANGLE
330mm x 165mm x 70mm
(13" x 6.5" x 2.76")



SQUARE
330mm x 330mm x 70mm
(13" x 13" x 2.76")

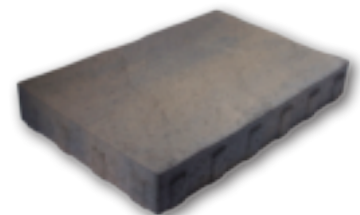


LARGE RECTANGLE
495mm x 330mm x 70mm
(19.5" x 13" x 2.76")

3 sizes of stone in each bundle.
A soldier course bundle is available, made up of all
Small Rectangle pavers.



APPIAN

Brown's Appian Stone will give your hardscape project a look reminiscent of ancient Rome. This large-scale paver has a gently rolling texture reflective of naturally cut flagstone used to pave Rome's Appian Way. This network of roads built in the third century B.C.E. featured a series of tight-fitting interlocking stones. Roads of pavers like this provided quick transport of troops and supplies for Rome's forces. The Appian Stone comes in three distinct stone sizes for a wide assortment of possible laying patterns.

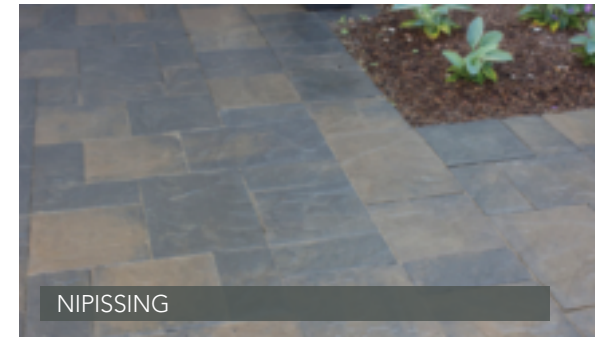


COLOUR OPTIONS



SANDSTONE



BLACKWOOD



NIPISSING




TIMBERWOOD

COLONIAL

NEW

Brown's newest addition to the 2016 Signature Collection is a paver with classic style and timeless elegance. With a smooth surface and gently textured sides, Colonial is a paver that will add an element of richness and class to any project. With a variety of sizes, it is even easier to create the perfect work of art. From a simple walkway to a complex backyard hideaway, Colonial will add a touch of style and class to any outdoor project.

SHAPES AND SIZES



COLONIAL 9X9
225mm x 225mm x 60mm
(9" x 9" x 2.36")



COLONIAL 6X9
150mm x 225mm x 60mm
(6" x 9" x 2.36")



COLONIAL 6X6
150mm x 150mm x 60mm
(6" x 6" x 2.36")

75mm x 150mm x 60mm
(3" x 6" x 2.36")
20 pieces per bundle



SANDSTONE

COLOUR OPTIONS



SANDSTONE



BLACKWOOD

ATHENIAN

Brown's newest pavers are an ideal product for virtually any landscaping project. It is ideal for driveways, walkways, patios or pool decks. Athenian Pavers may be used in driveways and in high traffic areas with relative ease. With a thickness of 70mm, these durable pavers are incredibly easy to maintain and will add significant elegance to any property.

SHAPES AND SIZES



409 mm x 163 mm x 70mm
(16.10" x 6.42" x 2.76")



327 mm x 163 mm x 70mm
(12.87" x 6.42" x 2.76")



245 mm x 163 mm x 70mm
(9.65" x 6.42" x 2.76")



163 mm x 163 mm x 70mm
(16.42" x 6.42" x 2.76")

4 sizes of stone in each bundle.




NIPISSING

COLOUR OPTIONS



BLACKWOOD



SANDSTONE



NIPISSING

BELGIUM

BELGIUM COBBLE

Possibly Brown's most versatile paving stone, Belgium Cobble has a textured surface for a relaxed appearance. With six different sized stones (available in five bundle configurations), 3"x6", 6"x6", 6"x9", 9"x9", 6"x12" and 12"x12", one can use each size of stone independently, or mix two or more sizes together for almost limitless pattern combinations.

SHAPES AND SIZES



BELGIUM 12X12
300mm x 300mm x 60mm
(12" x 12" x 2.36")



BELGIUM 9X9
225mm x 225mm x 60mm
(9" x 9" x 2.36")



BELGIUM 6X12
150mm x 300mm x 60mm
(6" x 12" x 2.36")



BELGIUM 6X9
150mm x 225mm x 60mm
(6" x 9" x 2.36")



BELGIUM 6X6
150mm x 150mm x 60mm
(6" x 6" x 2.36")

75mm x 150mm x 60mm
(3" x 6" x 2.36")
20 pieces per bundle



ROBINSON

COLOUR OPTIONS



CHARCOAL (6x9 only)



SANDSTONE



TIMMINS



BLACKWOOD

BELGIUM CLASSIC

Our classic line of Brown's Belgium Cobble paver sizes – 3"x 6", 6"x6", 6"x9", 9"x9" – is put through a gentle tumbling process which gives the stone a wonderful aged look. This antiqued look comes in four different sizes that you can use individually, or mixed together for an abundance of repeat or random patterns.

SHAPES AND SIZES

BELGIUM CLASSIC 9X9

225mm x 225mm x 60mm
(9" x 9" x 2.36")



BELGIUM CLASSIC 6X9

150mm x 225mm x 60mm
(6" x 9" x 2.36")



BELGIUM CLASSIC 6X6

150mm x 150mm x 60mm
(6" x 6" x 2.36")



75mm x 150mm x 60mm
(3" x 6" x 2.36")
20 pieces per bundle



ROBINSON



LAURENTIAN



BLACKWOOD



NIPISSING (6x9 only)

VENETIAN

VENETIAN COBBLE

Reminiscent of the cobblestone streets of Old Europe, these quality smaller-scale pavers offer a multitude of design possibilities. Three different stone profiles; Venetian Random, Venetian Soldier and Venetian Square can each be used independently, or can be used together to create a variety of amazing looking paver patterns.

SHAPES AND SIZES



VENETIAN SQUARE
240mm x 240mm x 60mm
(9.5" x 9.5" x 2.36")



VENETIAN SOLDIER
240mm x 120mm x 60mm
(9.5" x 4.8" x 2.36")



VENETIAN CIRCLE
Add innovative design elements to your outdoor environment with full and half circles, fans and sweeping radiuses. They can be used with any paving stone system to create a customized look that's visually inspiring and impressive.

VENETIAN RANDOM
3 sizes of stone in each bundle.



LARGE RECTANGLE
180mm x 120mm x 60mm
(7.1" x 4.8" x 2.36")



SQUARE
120mm x 120mm x 60mm
(4.8" x 4.8" x 2.36")



SMALL RECTANGLE
60mm x 120mm x 60mm
(2.4" x 4.8" x 2.36")




COLOUR OPTIONS



TIMMINS



ROBINSON



LAURENTIAN



BLACKWOOD



VENETIAN CLASSIC

All of Brown's Venetian Classic pavers have the old-world style antiqued look. The traditional look of Venetian offers an attractive, distinctive impression while maintaining its practical and durable qualities.

SHAPES AND SIZES

VENETIAN CLASSIC SQUARE

240mm x 240mm x 60mm
(9.5" x 9.5" x 2.36")



VENETIAN CLASSIC SOLDIER

240mm x 120mm x 60mm
(9.5" x 4.8" x 2.36")



VENETIAN CLASSIC CIRCLE



VENETIAN CLASSIC RANDOM

3 sizes of stone in each bundle



LARGE RECTANGLE
180mm x 120mm
x 60mm
(7.2" x 4.8" x 2.36")



SQUARE
120mm x 120mm
x 60mm
(4.8" x 4.8" x 2.36")



SMALL RECTANGLE
60mm x 120mm
x 60mm
(2.4" x 4.8" x 2.36")

ROBINSON

NORDIC

NORDIC STONE

Although Nordic Stone is a one-size only paver, it is offered in a wide variety of colors. This timeless and simple brick-size paver has long been a favorite for many because it easily accommodates a wide-variety of patterns for both residential and commercial projects.



200mm x 100mm x 60mm
(7.91" x 3.97" x 2.36")

Available in 80mm
(special order)

NORDIC STONE CLASSIC

Brown's base model brick paver is also made available in a tumbled version. This model combines Nordic simplicity with a classic old-world style, look and texture.




200mm x 100mm x 60mm
(7.91" x 3.97" x 2.36")

Available in 80mm
(special order)

NORDIC SQUARE

A square version of our Nordic Stone paver, this unique 8" x 8" can be used on its own for a definitive grid pattern, or combined with the standard Nordic to create a variety of diverse laying patterns.



200mm x 200mm x 60mm
(7.91" x 7.91" x 2.36")

COLOUR OPTIONS



SALMON



RED



GRANITE



CHARCOAL



BROWN



SANDSTONE



TIMMINS



ROBINSON



LAURENTIAN



FAIRBANKS



BLACKWOOD



AUTUMN

FAIRBANKS

AVENNIO

Brown's Avennio Pavers deliver a blend of performance, design, ease-of-care and a trendy appearance. At 80mm thick, Avennio pavers can be used in any application from patio to roadway. Beyond appearances, your pavers should be functional. The lineal proportions evoke a contemporary modern feel that will suit almost any paver project. Brown's Avennio pavers are easy-to-clean and are very low-maintenance, making them a great selection for your project.

8 sizes of stone in each bundle.

SHAPES AND SIZES



355 mm x 115 mm x 80mm
(14" x 4.53" x 3.15")



315 mm x 115 mm x 80mm
(12.40" x 4.53" x 3.15")



275 mm x 115 mm x 80mm
(10.83" x 4.53" x 3.15")



235 mm x 115 mm x 80mm
(9.25" x 4.53" x 3.15")




235 mm x 85 mm x 80mm
(9.25" x 3.35" x 3.15")



275 mm x 85 mm x 80mm
(10.83" x 3.35" x 3.15")



315 mm x 85 mm x 80mm
(12.40" x 3.35" x 3.15")



355 mm x 85 mm x 80mm
(14" x 3.35" x 3.15")



COLOUR OPTIONS



GRANITE



CHARCOAL



SANDSTONE

AQUAPAVE®

FAIRBANKS


SHAPES AND SIZES



AQUAPAVE® NORDIC
200mm x 100mm x 80mm
(7.91" x 3.97" x 3.15")

Key Components of the AquaPave® Permeable On-Site Stormwater Source Control Systems

AQUAPAVE®

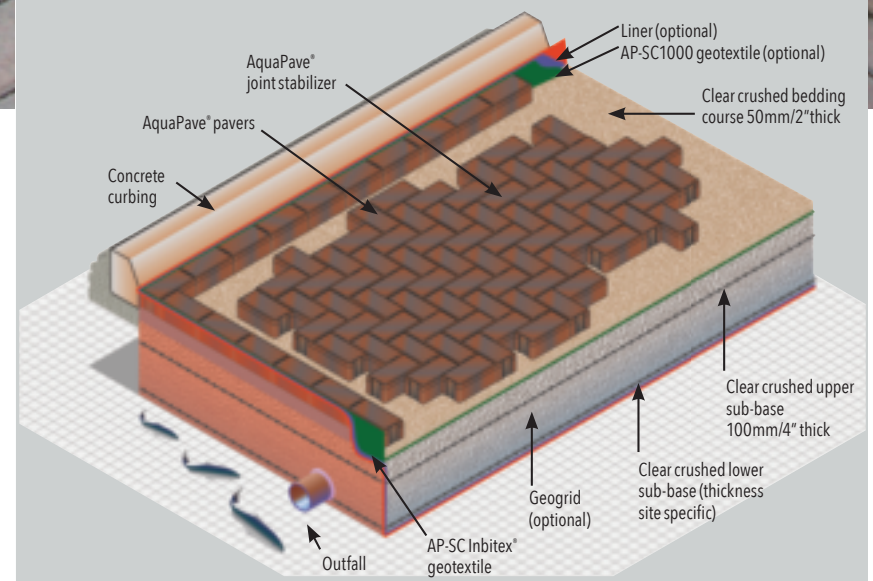



AQUAPAVE®

PERMEABLE ON-SITE STORMWATER SOURCE CONTROL SYSTEM

The AquaPave® system allows commonly recurring rainstorms to infiltrate through a permeable concrete paving stone surface into a clear crushed open graded aggregate base before infiltrating back into the ground or released into storm sewers. Known as permeable interlocking concrete pavement, the system acts as an infiltration facility for the storage, treatment and improvement of released water.

AquaPave® is the only permeable paver system on the market that directly incorporates a hydrocarbon treatment technology. The Inbitex® Geotextile system prevents oil and fuel that drips onto the parking and driving surfaces from contaminating the groundwater and area waterways. With thousands of applications worldwide, many of which have been in place for over a decade, the AquaPave® system has passed the test of time.

COLOUR OPTIONS (special order)



SALMON

RED

GRANITE

CHARCOAL

BROWN

SANDSTONE

TIMMINS

ROBINSON

LAURENTIAN

FAIRBANKS

BLACKWOOD

AUTUMN

PAVER INSTALLATION

1. PLANNING

Outline the proposed area of construction with a garden hose and then park vehicles (for driveways) / place furniture (for patios) in the area to ensure that the final product is adequately sized. Once everything looks fine, transfer the information onto paper.

2. EXCAVATION & BASE PREPARATION



The depth of the excavation will depend upon the project and soil conditions; for example, a driveway excavation is normally 400-600mm (16-24") deep, while a walkway or patio excavation is normally 200-250mm (8-10").

To provide a secure base in which to install the edge restraint, the area of the excavation needs to be larger than the area being paved; the rule of thumb is to extend the excavation outwards in all directions equal to the total depth of the excavation.

Prior to starting the work, place stakes at each end of the job and run string lines between them to represent the desired final grade; ensure a minimum slope of 1mm per 100mm (1/8" per 12") for proper drainage away from your home. While excavating, use a measuring tape to verify depths off of the string lines. When the excavating is completed, remove any debris and then compact the native material with at a minimum a 7,000 lbf tamper. Spread the backfill material in loose layers of no greater than 150mm (6"), wet the soil with water (helps increase compaction)


and compact into place. Continue this process until within 85mm (3 1/3") of final proposed grade. Run a 3m long straight edge over the completed area to detect any high/low spots.

3. EDGE RESTRAINTS

Lay a row of pavers from one side of the area to the other and then position your curbs accordingly to avoid unnecessary cuts. For concrete curbs, dig a trench to the required depth (subject to final placement level of curb), place the curbs and then backfill to original base grade. For plastic curbing, the sections are positioned directly on top of the base and then staked into place using 250mm (10") spikes.

4. BEDDING SAND

The key is to ensure a consistent thickness for the loose sand. The easiest way to do this is to use 25mm (1") diameter Schedule 80 PVC pipe for guide rails (the outside diameter is 35mm).



Spread the sand loosely between a pair of pipes, then pull a straightedge along the top to level the sand out (see illustration). Avoid disturbing the sand once in place.

5. LAYING THE PAVERS

The laying pattern used is subject to personal preference; however, herringbone patterns are recommended for traffic areas. Place chalk lines on sand at 2m (6') intervals to provide straight line guides during installation. Always start laying at the lowest point so that stones cannot separate; place hand

tight. Use a rubber mallet as required to adjust stones. While laying, mix pavers from at least 4 different cubes at a time so that any colour variations between cubes are blended in.




Cut pavers to fill gaps along edges and around obstacles as required using cantilever splitters or masonry saws. For curves, place pavers beyond the final edge, mark off the desired curve, and then using a masonry saw cut the pavers in place. Ensure that area is washed down after cutting as the residue can create stains.

6. COMPACTION & FINISHING

After all pavers are in position (or at the end of each day), sweep off the surface completely and then compact the pavers into the bedding sand using a 5000 lbf plate tamper. Spread dry jointing sand and sweep into joints until full. Clean off surface and vibrate jointing sand into spaces using tamper. Repeat until joints are completely full.

INTERLOCKING PAVER SYSTEM INSTALLATION PROFILE

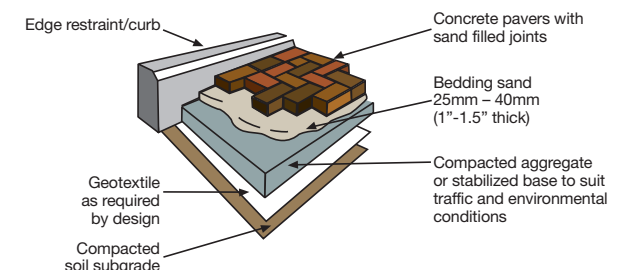

DIMENSIONAL CLASSIC




BLACKWOOD

DIMENSIONAL CLASSIC

This versatile rustic stone block is ideal for planter walls, light stands, barbeque enclosures, outdoor bars, driveway entrance pillars and edge restraints. Masonry adhesive is recommended for any free-standing structure.

SHAPES AND SIZES



DIMENSIONAL CLASSIC
270mm long x 180mm deep x 90mm high
(10.63" long x 7.09" deep x 3.54" high)

COLOUR OPTIONS




SANDSTONE




TIMMINS



ROBINSON



LAURENTIAN



BLACKWOOD



AUTUMN

PARKWALL®

PARKWALL®

Brown's favourite Signature series retaining wall product, the reliable and economical Parkwall® Retaining Wall system is aesthetically pleasing and easy to construct. Compatible to work in both curved and straight configurations, Parkwall has the flexibility to match almost any design.

For walls up to 3.4m (11.1') in height when geogrid is used.




ROBINSON



TIMMINS

SHAPES AND SIZES

Each shape bundled separately.



PARKWALL® STRAIGHT

150mm high x 200mm wide x 295mm deep (5.9" high x 7.87" wide x 11.61" deep)



PARKWALL® TAPER

150mm high x 200mm (tapers to 175mm) wide x 295mm deep (5.9" high x 7.87" (tapers to 6.89") wide x 11.61" deep)



PARKWALL® CORNER

150mm high x 193mm wide x 295mm deep (5.9" high x 7.59" wide x 11.61" deep). Available as left or right corner



PARKWALL® 12" CAP

75mm high x 600mm wide x 300mm deep (2.95" high x 23.6" wide x 11.81" deep)



PARKWALL® WEDGE CAP

75mm high x 200mm (tapers to 175mm) wide x 325mm deep (2.95" high x 7.87" (tapers to 6.89") wide x 12.79" deep)



PARKWALL® PILLAR CAPSTONE

75mm high x 610mm wide x 610mm deep (2.95" high x 24" wide x 24" deep)



SANDSTONE

PARKWALL® CLASSIC

Parkwall® Classic has all the same features of Parkwall, but put through the tumbling process, given a natural aged appearance that adds elegance to any landscape design project.

For walls up to 3.4m (11.1') in height when geogrid is used.

SHAPES AND SIZES



PARKWALL® CLASSIC STRAIGHT

150mm high x 200mm wide x 295mm deep
(5.9" high x 7.87" wide x 11.61" deep)



PARKWALL® CLASSIC CORNER

150mm high x 193mm wide x 295mm deep (5.9" high x 7.59" wide x 11.61" deep).
Available as left or right corner




PARKWALL® CLASSIC TAPER
150mm high x 200mm (tapers to 175mm) wide x 295mm deep (5.9" high x 7.87" (tapers to 6.89") wide x 11.61" deep)

COLOUR OPTIONS



GRANITE




SANDSTONE




TIMMINS



ROBINSON




LAURENTIAN



BLACKWOOD



AUTUMN



TIMBERWOOD

WEDGESTONE™

WEDGESTONE™

Brown's Wedgestone is a do-it-yourself dream. A true combination of versatility and easy installation, two different pieces, a standard unit with a lock/key system on top, and a coping unit with a lock/key system on bottom with a finished surface on the top. Brown's Wedgestone is made with a quarried face both front and back making it ideal for circular, curved and straight garden walls, fire-pits, steps, flower beds or tree-rings.

WEDGESTONE™ CLASSIC

A tumbled version of Brown's versatile Wedgestone, this classic version is suited best for those looking for a more traditional old-world style look.

For vertical walls up to 400 mm (15.75") in height or setback walls up to 600 mm (23.6") in height.



ROBINSON

SHAPES AND SIZES



STANDARD UNIT
200mm deep x 225mm (tapered to 150mm) wide x 100mm high
(7.87" deep x 8.9" (tapered to 5.9") wide x 3.93" high)




COPING UNIT
200mm deep x 225mm (tapered to 150mm) wide x 100mm high
(7.87" deep x 8.9" (tapered to 5.9") wide x 3.93" high)




WEDGESTONE™ CLASSIC COPING UNIT
200mm deep x 225mm (tapered to 150mm) wide x 100mm high
(7.87" deep x 8.9" (tapered to 5.9") wide x 3.93" high)

COLOUR OPTIONS




GRANITE



SANDSTONE



TIMMINS



ROBINSON



LAURENTIAN

PISA® LIGHT

Brown's Pisa® Light is a great option for many great landscape and garden ideas. Easy to install and maintain, the Pisa® Light wall system includes straight units, taper units, corners, caps and possible lighting systems. Attractive curved walls, straight walls, steps and patio areas are made with ease and beauty using the Pisa® Light system.



LAURENTIAN


SHAPES AND SIZES



BLACKWOOD



AUTUMN



CHARCOAL



PISA® LIGHT STRAIGHT
150mm high x 200mm wide x 216mm deep
(5.9" high x 7.87" wide x 8.5" deep)



PISA® LIGHT CORNER
150mm high x 200mm wide x 290mm deep
(5.9" high x 7.87" wide x 11.4" deep)

Available as left or right corner



PISA® LIGHT 9" CAP
75mm high x 600mm wide x 225mm deep
(2.95" high x 23.6" wide x 8.85" deep)

SEGMENTAL RETAINING WALL INSTALLATION

1. PLANNING

The height and purpose of the wall, as well as existing soil types, groundwater conditions, and surrounding land uses, all play a part in the design of a retaining wall. That is why we recommend that you consult with your local supplier to verify which wall system will work for your given project. Remember to incorporate a drainage system into your design so that water does not become trapped behind your wall.

2. EXCAVATION & BASE PREPARATION

Mark off the front and back of the wall, and then the front and back of the excavation; the offset at the front of the wall is typically 100-150mm (4-6"), while the offset at the back of the wall is 150mm (6") for low walls (<27") and 300mm (12") for higher walls. Where the excavation is cutting into a slope, grade the back of the excavation at the angle at which the native soil can be safely left without collapsing.

To prevent the wall from sliding forward, it is common practice to bury at a minimum 1 full course of wall stones. The depth of the excavation also needs to allow for a 150mm (6") thick layer of base material.

Once the excavation is completed, remove any debris and then thoroughly compact the native soil. Spread the backfill material in loose layers of no greater than 75mm (3"), wet the soil with water (helps increase compaction) and compact into place. Leave a v-notch at the back of the excavation for the drain pipe. Set string level to verify final grade. En-

sure base is level front to back and side to side as this will minimize the leveling of individual blocks and will ensure straight lines and smooth arcs.

Lay the geotextile starting just under the back of the wall and up the back slope of the trench. Remember to leave adequate material at the top of the slope for the fold back, and to overlap the separate pieces a minimum of 150 mm (6"). Use sand bags or similar to keep the geotextile in place as required.

Place the drain pipe in the v-notch at the back of the foundation, and surround with drain rock.

3. LAYING THE BASE COURSE

Select the starting point for the wall. If the base of the wall is stepped up, start at the lowest point and work up; remember to adjust for the natural batter in the wall between steps. If there is an outside corner, start with the corner unit (to potentially avoid having to cut stones later on to fit).

Set a string level to mark the back of the first course. Use a level to ensure blocks are level front to back and side to side.

4. REMAINING COURSES


Sweep the top of each course prior to proceeding. Place next course of units in a running bond pattern so that the middle of the unit is approximately above the joint between the underlying blocks. NEVER ALIGN BLOCKS VERTICALLY. After laying a course, backfill and compact behind wall to the same elevation as the top of the just placed units.

5. COPING & GRADING

Where coping is required, sweep the top of the underlying course prior to proceeding. Place a line of butyl tape or Bond Loc adhesive on both sides of the groove. Place the coping unit on top and apply some pressure to secure.

Prior to backfilling behind the coping and last wall unit, pull filter cloth towards back of wall and tuck in place. Fill to final grade to suit desired conditions; ensure final slopes allow for proper drainage away from the wall.

RETAINING WALL CROSS SECTION

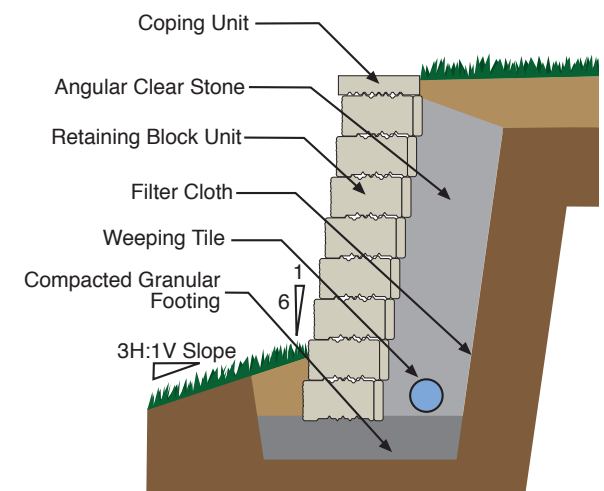

CURBING



Brown's Concrete makes an assortment of distinct and functional curbs for unique landscape needs. Whether it's our bullnose curb, three-foot curb or meter curb, all of our curbing can provide your project with structural support and pronounced edging for your driveway or patio areas.

SHAPES AND SIZES



BULLNOSE CURB
115mm wide x 570mm long x
90mm high (4.5" wide x 22.5"
long x 3.5" high)



3 FT. CURB
80mm wide x 900mm long
x 150mm high (3.25" wide x
35.5" long x 6" high)



METRE CURB
150mm wide x 1000mm long
x 150mm high (6" wide x 39"
long x 6" high)

SIGNATURE FIRE PIT KITS

NEW



KENT FIRE PIT KIT

The Kent Fire Pit Kit is a larger unit with grand proportions. . This square fire pit kit comes complete with the stone and steel insert. The refined dimensional look of this unit is well-suited to that yard with modern, clean-cut lines where angles and depth are important.



OXFORD FIRE PIT KIT

The Oxford Fire Pit Kit is a great fire pit for a smaller space. With its smaller design and low profile it is perfect for a small yard or patio. The gentle features of a round fire pit allow it to blend in with a wide variety of architectural styles.





Brown's Concrete Products Limited
3075 Herold Drive,
Sudbury, Ontario, Canada P3E 6K9

Telephone: 705-522-8220
Fax: 705-522-2732
Toll-free: 1-800-461-4888
Email: info@brownsconcrete.com

www.BrownsConcrete.com



Canadian
Home Builders'
Association



Canadian Concrete Masonry
Producers Association



icpi
Interlocking Concrete
Pavement Institute®



NATIONAL
CONCRETE MASONRY
ASSOCIATION

Note: Colour swatches are for reference only and may not represent the actual product colour. We recommend that you see your local dealer to view actual sample pieces prior to final colour selection.

Authorized Dealer

BROWN'S LIFETIME WARRANTY

Brown's Concrete Products Limited provides a Lifetime Warranty to the original purchaser on the structural integrity of its products used in residential applications. If the material installed on the owner's property, using our recommended guidelines, proves to be defective the product will be replaced without cost. Colour matching and the occurrence of efflorescence cannot be guaranteed. The Warranty does not cover

damage resulting from subgrade settlement or movement, contact with chemicals or paint, discolouration due to airborne contamination, staining, oxidation, improper sealing or the use of de-icing chemicals other than sodium chloride. Removal and replacement labour, and transportation costs, are not included. This warranty is not transferable and proof of purchase is required.

