




GRANITE

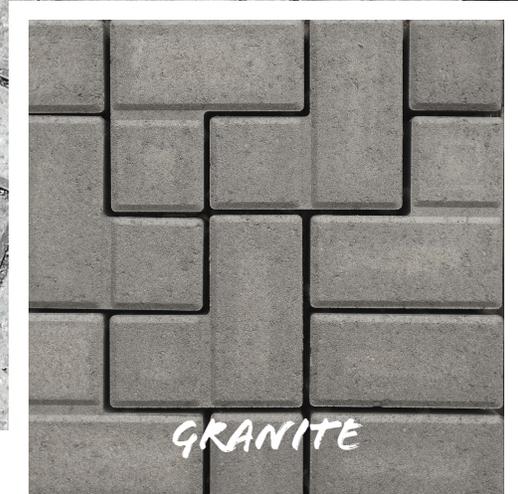


ACQUAVIA 80

THE GREENER CHOICE BENEATH YOUR FEET




ACQUAVIA 80


THE GREENER CHOICE BENEATH YOUR FEET




BLOCK 1
7.6" L x 7.6" W (3.7" at ends of "L") x 2.76" D
193mm x 193mm (93mm at ends of "L") x 80mm



BLOCK 2
7.6" L x 7.6" W (3.7" at ends of "L") x 2.76" D
193mm x 193mm (93mm at ends of "L") x 80mm



BLOCK 3
3.7" L x 7.6" W x 2.76" D
93mm x 193mm x 80mm



BLOCK 4
3.7" L x 3.7" W x 2.76" D
93mm x 93mm x 80mm

Permeable Interlocking Concrete Paver (PICP) designed for maximum efficiency through mechanical installation achieving a 6% void space for drainage

CSA A231.2 | ASTM C936 | ASTM C1372


PAVER TOLERANCES: +/-3mm on thickness | **MAXIMUM ABSORPTION (AVG):** 2.6%

COMPRESSIVE STRENGTH (MINIMUM INDIVIDUAL): 47MPa | **COMPRESSIVE STRENGTH:** 75MPa

PACKAGING


- 7 layers per pallet
- 10.5 sq. ft. per layer
- 73.5 sq. ft. per pallet
- 2,603lbs per pallet

ACQUAVIA 80 PALLET LAYER

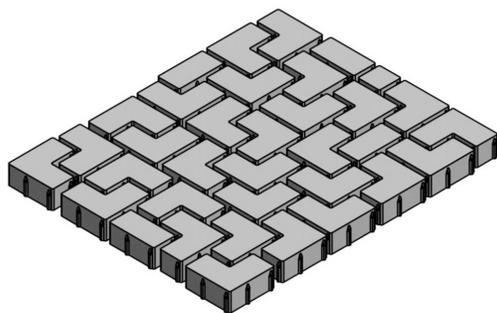


LAYING PATTERN

Laying Pattern A — without layer interlocking

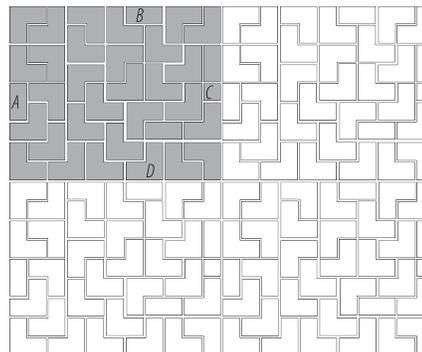

Laying Pattern B — with layer interlocking

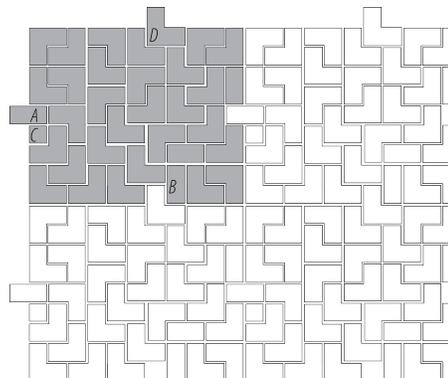

NOTES
