

AMBERLEY

DESIGNED AT 60MM THICKNESS, IT'S IDEAL FOR ALL RESIDENTIAL APPLICATIONS



AMBERLEY



DESIGNED AT 60MM THICKNESS, IT'S IDEAL FOR ALL RESIDENTIAL APPLICATIONS



9.05" L x 4.52" W x 2.36" D
230mm x 115mm x 60mm



9.05" L X 9.05" W x 2.36"D
230mm x 230mm x 60mm



13.58" L x 9.05" W x 2.36" D
345mm x 230mm x 60mm

CSA A231.2 | ASTM C936 | ASTM C1372


PAVER TOLERANCES: +/-3mm on thickness | MAXIMUM ABSORPTION (AVG): 2.6%

COMPRESSIVE STRENGTH (MINIMUM INDIVIDUAL): 47MPa | COMPRESSIVE STRENGTH: 75MPa


PACKAGING

- 10 layers per bundle
- 12.8 sq. ft. per layer
- 127.8 sq. ft. per pallet
- 3,368 lbs per pallet

RANDOM LAYER

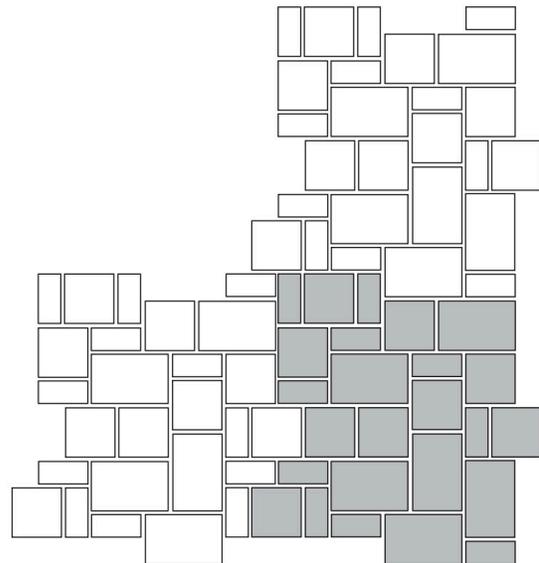

AMBERLEY PALLET LAYER

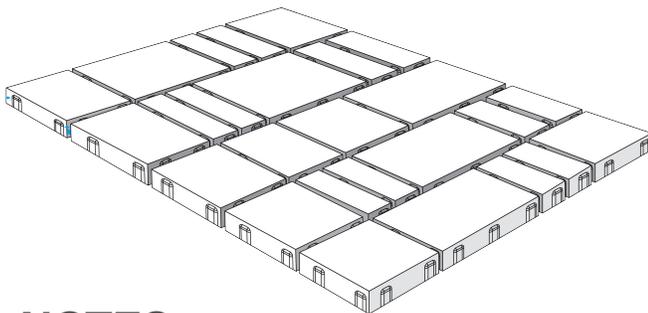

Linear patterns available.

NOTES
